

NITIN CORPORATION

402, 4th Floor,
Bezzola Commercial Complex,
Sion – Trombay Road,
Chembur,
Mumbai – 400071,
India.

WEB : www.corponit.com

E – MAIL : enquiry@corponit.com
nitincorporation@yahoo.com

Contact No. : +91 - 9920404345

THE FOLLOWING ENGINE GENERATOR SETS ARE AVAILABLE FOR SALE WITH US WITH IMMEDIATE DELIVERY:

1 No. - 36 MW WARTSILA (2008) make Gas Engine based Power Plant comprising of 4 Nos. 9 MW each, WARTSILA make, type 20V34SG Gas Engine Generator sets, having the Following Technical Specifications:

TECHNICAL SPECIFICATION:

ENGINE:

Make	:	WARTSILA
Year of make	:	2008, Operation till 2024
Type	:	20V34SG
Number of Units	:	4 Units
Capacity of each unit	:	9 MW
Total Capacity	:	36 MW
Speed	:	750 RPM
Fuel	:	Natural Gas
Cooling System	:	Closed loop Radiators
Running Hours	:	105,000 Hours, Maintenance done as per OEM
Generation Voltage	:	11 kV
Plant output voltage	:	33 kV
Frequency	:	50 Hz
Technology	:	Reciprocating Engine

GENERATOR:

Make	:	AVK
Type	:	DIG 167 f/8
Year of Make	:	2008
Nominal Output	:	10913 KVA
Speed	:	750 RPM
Over speed	:	938 RPM
Voltage	:	11000 V; AC
Current	:	573 A

PF : 0.8
 Frequency : 50 Hz
 Phase : 3
 Connection : Y
 Duty : S1
 Insulation Class : F
 Ambient Temp : 50°C
 IP : 23
 IC : 01
 Excitation Voltage : 52 V
 Excitation Current : 4.4 A

RUNNING HOURS HISTORY:


Sr. No.	RUN. Hrs Oct. 04, 2024	16K Maintenance	
		Done at run hours	After maint. Run Hours
1	105,380	88,774	16,606
2	103,979	83,917	20,062
3	105,263	85,921	19,342
4	104,751	87,318	17,433

SCOPE OF SUPPLY

The above Gas Engine Generator Sets are complete with the following accessories:

1. Wartsila 20V34SG Gas Engine- 4 Units.
2. AVK 10913 kVA, 11 kV, 50 Hz, P.F. 0.8 Alternator- 4 Units.
3. Auxiliary Modules.
4. Fuel System- Gas System & Gas System Piping.
5. Lubricating Oil System & Lubricating Oil System Piping.
6. Compressed Air System & Compressed Air System Piping.
7. Cooling System.
8. Intake Air System.
9. Exhaust System.
10. Electrical System.
11. Control System.
12. Control Panels.
13. Cables & Accessories.
14. Medium Voltage System.
15. Medium Voltage Cable.
16. Low Voltage System.
17. Low Voltage Cables.
18. DC System.
19. Tools.
20. Spare Parts.
21. Full Wartsila Documentation.

PHOTOS:

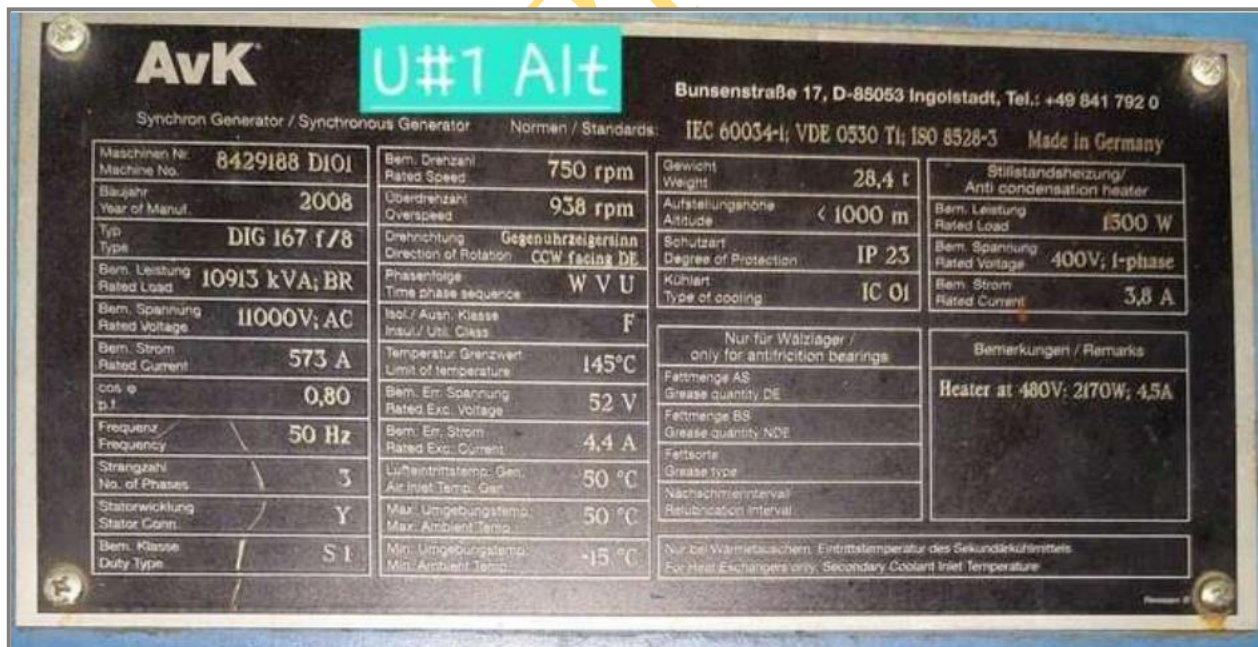



Genset #01



Engine Hall







WÄRTSILÄ 34SG

Gas engine generating set

The Wärtsilä 34SG is a four-stroke, spark-ignited, lean-burn gas engine generating set. Its agility and flexibility make the Wärtsilä 34SG generating set an excellent choice for both flexible baseload and balancing renewables applications. It also offers a unique fast-starting capability, which enables rapid response to fluctuations inherent to renewable generation.

Wärtsilä 34SG helps to provide an efficient, reliable and cost-efficient source of energy for power producers. It also provides enough spinning reserve for balancing whenever needed.

The Wärtsilä 34SG engine generating set is extremely reliable as it is based on the well-proven Wärtsilä 32 engine, that has a track record from the mid-1990s. The Wärtsilä 34SG features a wide power output range from 5.6 to 9.8 MW, as it is available in 12V, 16V and 20V cylinder configurations.

We help our customers to decarbonise their energy systems by developing market-leading technologies such as flexible power plants, that can be delivered as engineered equipment (EEQ), or engineering, procurement and construction (EPC). With our full lifecycle support we can ensure guaranteed performance of the plant.

Key benefits

- Runs on natural gas, biogas, synthetic methanol and is capable of hydrogen blending
- No start cost, limitations nor degradation in number of starts
- Compact sizing enables transportation to demanding locations
- Capable of operating in high altitude
- Minimal water consumption
- Longer maintenance intervals
- Optimised performance and efficiency supported by Wärtsilä Lifecycle solutions

2

minutes to full load

48.9

% electrical efficiency

>1 000

generating sets
delivered


Main technical data

Engine generating set						
Cylinder configurations	12V, 16V, 20V					
Cylinder bore	340 mm					
Piston stroke	400 mm					
Engine speed	750 rpm (50 Hz), 720 rpm (60 Hz)					
Performance ¹						
	20V34SG		16V34SG		12V34SG	
Rated electrical power (kW)	9 795 (50 Hz)	9 388 (60 Hz)	7 830 (50 Hz)	7 491 (60 Hz)	5 840 (50 Hz)	5 580 (60 Hz)
Electrical efficiency (%)	48.9 (50 Hz)	48.8 (60 Hz)	48.9 (50 Hz)	48.7 (60 Hz)	48.0 (50 Hz)	47.8 (60 Hz)
Heat rate (kJ/kWh)	7 363 (50 Hz)	7 374 (60 Hz)	7 367 (50 Hz)	7 396 (60 Hz)	7 501 (50 Hz)	7 538 (60 Hz)
Loading and unloading						
	Connected to grid			Full load		
Regular start time (min:sec)	00:30			< 5:00		
Fast start time (min:sec)	00:30			< 2:00		
Shut-down time (min)	1					
Ramp rate (hot, load /min)	> 100%					
Minimum load						
Unit level	10%					
Plant level	Equal to minimum load of one unit					

Maximum transportation dimensions (mm) and weight (tonnes) ²				
Genset type	Length (A)	Width (B)	Height (C)	Dry weight
12V34SG	10 454	3 350	4 511	102
16V34SG	11 456	3 350	4 511	125
20V34SG	13 142	3 350	4 573	136

¹ Rated electrical power and electrical efficiencies are given at generator terminals at 100kPa ambient pressure, 25°C suction air temperature and 30% relative humidity, and without engine driven pumps. Power factor 1.0 (site). NOx emission level 90ppm @15% O2 dry. Electrical efficiency and heat rate with 5% tolerance. Gas LHV >28MJ/Nm3. Gas methane number >80. Site conditions, fuel and applicable emission limits may have an impact on performance figures. Please contact Wärtsilä for project-specific performance data.

² There are a number of dismantling options available for transportation of the generator set. These include different options for reduced weight and height. Please contact Wärtsilä for further information.

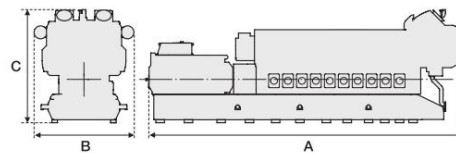

Disclaimer The information contained herein is provided for informational purposes only and may not be incorporated, in whole or in part, into any agreement or proposal. No representation of any kind is made in respect of any information contained herein and Wärtsilä expressly disclaims any responsibility for, and does not guarantee, the correctness or the completeness of the information. The calculations and assumptions included in the information do not necessarily take into account all the factors that could be relevant in a particular case. Information herein shall not be construed as a guarantee or warranty of the performance of any Wärtsilä technology, equipment or installation.

The information in this document is subject to change without notice and the given data does not carry any contractual value. Wärtsilä assumes no responsibility for any errors that may appear in this document.
WÄRTSILÄ is a registered trademark. Copyright © 2023 Wärtsilä Corporation.

www.wartsila.com/energy



09/2023

WÄRTSILÄ