



**ENGINEERED SOLUTIONS  
FOR AUTOMATIC LUBRICATION.**


MEMOLUB.COM

NEW

CONNECT PRO



HOUSINGS

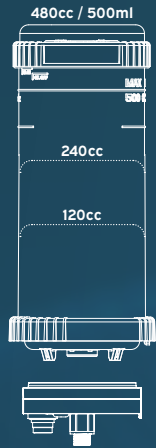


MEMO

MEMO SETTING <sup>(1)</sup>	0	1	2	3	4	5	6	7	8	9
AVERAGE DAILY OUTPUT <sup>(2)</sup> (IN CMP)	EXT	0.3	0.6	0.9	1.2	1.8	2.4	3.6	7.2	14.4
DOSING FREQUENCY	EXT	48h	24h	16h	12h	8h	6h	4h	2h	1h
CARTRIDGE REPLACEMENT INTERVAL										
120CC CARTRIDGE (IN MONTHS)	-	12	6	4	3	2	1.5	1	1/2	1/4
240CC CARTRIDGE + OIL-R500 (IN MONTHS)	-	24	12	8	6	4	3	2	1	1/2
480CC CARTRIDGE (IN MONTHS)	-	48	24	16	12	6	6	4	2	1

MAXIMUM STROKE PRESSURE	25 bar / 350 psi									
POWER SOURCE	3 x 1.5V DC Alkaline AA-LR6 batteries or External 12/24 V DC (6 DIN contact) - Minimum 15W - 1.0A									
REMOTE INSTALLATION DISTANCE	Up to 8 meters <sup>(3)</sup>									
PROGRESSIVE DISTRIBUTOR BLOCK	Compatible - 2, 4, 6, 8, 10, 12 outlets									
EXTERNAL TUBING	ø 8mm									
LUBRICANTS	Oil & Grease, NGLI #2 with an oil base up to 1500 cSt <sup>(4)</sup>									
TEMPERATURE EXPOSURE RANGE	-40°C to 60°C <sup>(5)</sup>									
CONNECTIONS	1/4 BSP									
VISUAL ALARMS	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="width: 20px; height: 10px; background-color: #90EE90; border: 1px solid black; border-radius: 5px;"></div> <div style="width: 20px; height: 10px; background-color: #FFD700; border: 1px solid black; border-radius: 5px;"></div> <div style="width: 20px; height: 10px; background-color: #FF4500; border: 1px solid black; border-radius: 5px;"></div> <div style="width: 20px; height: 10px; background-color: #FF0000; border: 1px solid black; border-radius: 5px;"></div> <div style="width: 20px; height: 10px; background-color: #4169E1; border: 1px solid black; border-radius: 5px;"></div> </div>									
EXTRA FEATURES										

NEW

VISIO

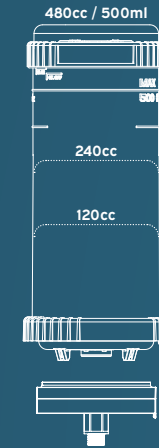


	0	1	2	3	4	5	6	7	8	9
AVERAGE DAILY OUTPUT <sup>(2)</sup> (IN CMP)	-	0.3	0.6	0.9	1.2	1.8	2.4	3.6	7.2	14.4
DOSING FREQUENCY	-	48h	24h	16h	12h	8h	6h	4h	2h	1h
CARTRIDGE REPLACEMENT INTERVAL										
120CC CARTRIDGE (IN MONTHS)	-	12	6	4	3	2	1.5	1	1/2	1/4
240CC CARTRIDGE + OIL-R500 (IN MONTHS)	-	24	12	8	6	4	3	2	1	1/2
480CC CARTRIDGE (IN MONTHS)	-	48	24	16	12	6	6	4	2	1

MAXIMUM STROKE PRESSURE	25 bar / 350 psi									
POWER SOURCE	3 x 1.5V DC Alkaline AA-LR6 batteries									
REMOTE INSTALLATION DISTANCE	Up to 8 meters <sup>(3)</sup>									
PROGRESSIVE DISTRIBUTOR BLOCK	Compatible - 2, 4, 6, 8, 10, 12 outlets									
EXTERNAL TUBING	ø 8mm									
LUBRICANTS	Oil & Grease, NGLI #2 with an oil base up to 1500 cSt <sup>(4)</sup>									
TEMPERATURE EXPOSURE RANGE	-40°C to 60°C <sup>(5)</sup>									
CONNECTIONS	1/4 BSP									
VISUAL ALARMS	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="width: 20px; height: 10px; background-color: #90EE90; border: 1px solid black; border-radius: 5px;"></div> <div style="width: 20px; height: 10px; background-color: #FFD700; border: 1px solid black; border-radius: 5px;"></div> <div style="width: 20px; height: 10px; background-color: #FF4500; border: 1px solid black; border-radius: 5px;"></div> </div>									
EXTRA FEATURES	-									

NEW

VISIO PRO

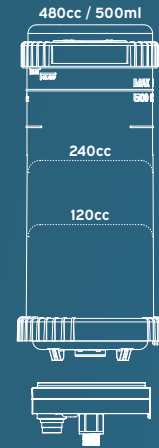


	0	1	2	3	4	5	6	7	8	9
AVERAGE DAILY OUTPUT <sup>(2)</sup> (IN CMP)	PLC	0.3	0.6	0.9	1.2	1.8	2.4	3.6	7.2	14.4
DOSING FREQUENCY	PLC	48h	24h	16h	12h	8h	6h	4h	2h	1h
CARTRIDGE REPLACEMENT INTERVAL										
120CC CARTRIDGE (IN MONTHS)	-	12	6	4	3	2	1.5	1	1/2	1/4
240CC CARTRIDGE + OIL-R500 (IN MONTHS)	-	24	12	8	6	4	3	2	1	1/2
480CC CARTRIDGE (IN MONTHS)	-	48	24	16	12	6	6	4	2	1


MAXIMUM STROKE PRESSURE	25 bar / 350 psi									
POWER SOURCE	External 12/24 V DC (6 DIN contact) - Minimum 15W - 1.0A									
REMOTE INSTALLATION DISTANCE	Up to 8 meters <sup>(3)</sup>									
PROGRESSIVE DISTRIBUTOR BLOCK	Compatible - 2, 4, 6, 8, 10, 12 outlets									
EXTERNAL TUBING	ø 8mm									
LUBRICANTS	Oil & Grease, NGLI #2 with an oil base up to 1500 cSt <sup>(4)</sup>									
TEMPERATURE EXPOSURE RANGE	-40°C to 60°C <sup>(5)</sup>									
CONNECTIONS	1/4 BSP									
VISUAL ALARMS	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="width: 20px; height: 10px; background-color: #90EE90; border: 1px solid black; border-radius: 5px;"></div> <div style="width: 20px; height: 10px; background-color: #FFD700; border: 1px solid black; border-radius: 5px;"></div> <div style="width: 20px; height: 10px; background-color: #FF4500; border: 1px solid black; border-radius: 5px;"></div> </div>									
EXTRA FEATURES	Settings + Feedback via PLC									

NEW


HPS

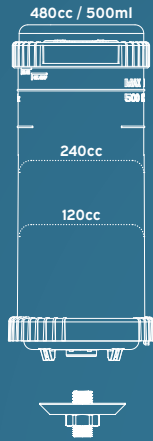


HPS PLUS

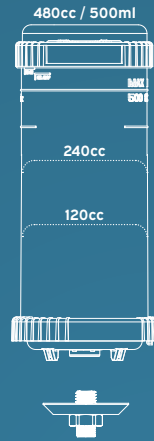

EPS

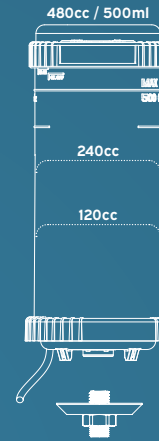

EPS PLUS

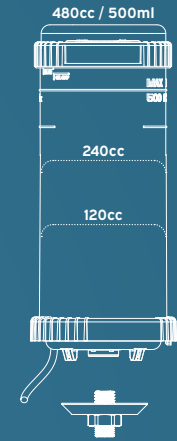

NEW

HOUSINGS

MEMO

MEMO SETTING

AVERAGE DAILY OUTPUT <sup>(2)</sup> (IN C/M<sup>2</sup>)

DOSING FREQUENCY

CARTRIDGE REPLACEMENT INTERVAL

120CC CARTRIDGE (IN MONTHS)

240CC CARTRIDGE + OIL-R500 (IN MONTHS)

480CC CARTRIDGE (IN MONTHS)

MAXIMUM STROKE PRESSURE

POWER SOURCE

REMOTE INSTALLATION DISTANCE

PROGRESSIVE DISTRIBUTOR BLOCK

EXTERNAL TUBING

LUBRICANTS

TEMPERATURE EXPOSURE RANGE

CONNECTIONS

VISUAL ALARMS

EXTRA FEATURES

<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
14.4	7.2	2.4	1.2	0.9	0.6	0.3
1h	2h	6h	12h	16h	24h	48h
1/4	1/2	1.5	3	4	6	12
1/2	1	3	6	8	12	-
1	2	6	12	16	-	-

25 bar / 350 psi

3 x 1.5 V DC Alkaline AA-LR6 batteries

Up to 8 meters <sup>(3)</sup>

Compatible - 2, 4, 6, 8, 10, 12 outlets

ø 8mm

Oil & Grease, NGLI #2 with an oil base up to 1500 cSt <sup>(4)</sup>

-20°C to 60°C <sup>(5) (6)</sup>

1/4 BSP

N/A

EX II 3 G Ex nC IIB T6 Gc  
EX II 3 D Ex tc IIIC T85°C IP66 Dc

<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
14.4	7.2	2.4	1.2	0.9	0.6	0.3
1h	2h	6h	12h	16h	24h	48h
1/4	1/2	1.5	3	4	6	12
1/2	1	3	6	8	12	-
1	2	6	12	16	-	-

25 bar / 350 psi

3 x 1.5 V DC Alkaline AA-LR6 batteries

Up to 8 meters <sup>(3)</sup>

Compatible - 2, 4, 6, 8, 10, 12 outlets

ø 8mm

Oil & Grease, NGLI #2 with an oil base up to 1500 cSt <sup>(4)</sup>

-40°C to 60°C <sup>(5) (6)</sup>

1/4 BSP

OK ERROR

EX II 3 G Ex nC IIB T6 Gc  
EX II 3 D Ex tc IIIC T85°C IP66 Dc

<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
14.4	7.2	2.4	1.2	0.9	0.6	0.3
1h	2h	6h	12h	16h	24h	48h
1/4	1/2	1.5	3	4	6	12
1/2	1	3	6	8	12	-
1	2	6	12	16	-	-

25 bar / 350 psi

External 24 V DC - Minimum 24W - 1.0A

Up to 8 meters <sup>(3)</sup>

Compatible - 2, 4, 6, 8, 10, 12 outlets

ø 8mm

Oil & Grease, NGLI #2 with an oil base up to 1500 cSt <sup>(4)</sup>

-20°C to 60°C <sup>(5)</sup>

1/4 BSP

N/A

-

<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
14.4	7.2	2.4	1.2	0.9	0.6	0.3
1h	2h	6h	12h	16h	24h	48h
1/4	1/2	1.5	3	4	6	12
1/2	1	3	6	8	12	-
1	2	6	12	16	-	-

25 bar / 350 psi

External 6/36 V DC - Minimum 15W - 1.0A

Up to 8 meters <sup>(3)</sup>

Compatible - 2, 4, 6, 8, 10, 12 outlets

ø 8mm

Oil & Grease, NGLI #2 with an oil base up to 1500 cSt <sup>(4)</sup>

-40°C to 60°C <sup>(5)</sup>

1/4 BSP

OK ERROR

-

NEW

NEW





**MEMORY**

**MEMORY PLUS**

**PLCD**

**PLCD PLUS**

HOUSINGS

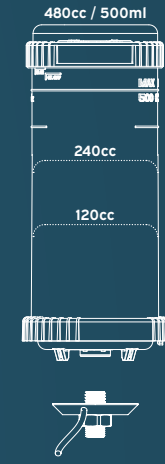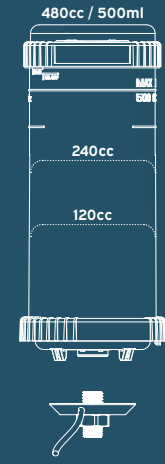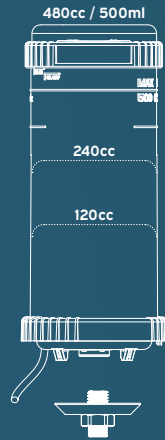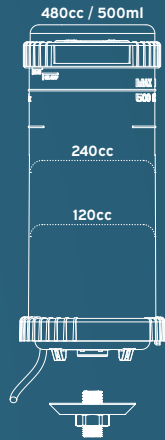

MEMO

MEMO SETTING



AVERAGE DAILY OUTPUT <sup>(1)</sup> (IN CMP)

14.4 7.2 2.4 1.2 0.9 0.6 0.3

14.4 7.2 2.4 1.2 0.9 0.6 0.3

via PLC

via PLC

DOSING FREQUENCY

1h 2h 6h 12h 16h 24h 48h

1h 2h 6h 12h 16h 24h 48h

via PLC

via PLC

CARTRIDGE REPLACEMENT INTERVAL

120CC CARTRIDGE (IN MONTHS)

1/4 1/2 1,5 3 4 6 12

1/4 1/2 1,5 3 4 6 12

240CC CARTRIDGE + OIL-R500 (IN MONTHS)

1/2 1 3 6 8 12 -

1/2 1 3 6 8 12 -

480CC CARTRIDGE (IN MONTHS)

1 2 6 12 16 - -

1 2 6 12 16 - -

-

-

MAXIMUM STROKE PRESSURE

25 bar / 350 psi

25 bar / 350 psi

25 bar / 350 psi

25 bar / 350 psi

POWER SOURCE

External 24 V DC - Minimum 24W - 1.0A

External 6/36 V DC - Minimum 15W - 1.0A

External 24 V DC - Minimum 24W - 1.0A

External 6/36 V DC - Minimum 15W - 1.0A

REMOTE INSTALLATION DISTANCE

Up to 8 meters <sup>(3)</sup>

Up to 8 meters <sup>(3)</sup>

Up to 8 meters <sup>(3)</sup>

Up to 8 meters <sup>(3)</sup>

PROGRESSIVE DISTRIBUTOR BLOCK

Compatible - 2, 4, 6, 8, 10, 12 outlets

Compatible - 2, 4, 6, 8, 10, 12 outlets

Compatible - 2, 4, 6, 8, 10, 12 outlets

Compatible - 2, 4, 6, 8, 10, 12 outlets

EXTERNAL TUBING

ø 8mm

ø 8mm

ø 8mm

ø 8mm

LUBRICANTS

Oil & Grease, NGLI #2 with an oil base up to 1500 cSt <sup>(4)</sup>

Oil & Grease, NGLI #2 with an oil base up to 1500 cSt <sup>(4)</sup>

Oil & Grease, NGLI #2 with an oil base up to 1500 cSt <sup>(4)</sup>

Oil & Grease, NGLI #2 with an oil base up to 1500 cSt <sup>(4)</sup>

TEMPERATURE EXPOSURE RANGE

-20°C to 60°C <sup>(5)</sup>

-40°C to 60°C <sup>(5)</sup>

-20°C to 60°C <sup>(5)</sup>

-40°C to 60°C <sup>(5)</sup>

CONNECTIONS

1/4 BSP

1/4 BSP

1/4 BSP

1/4 BSP

VISUAL ALARMS

N/A

OK

ERROR

N/A

OK

ERROR

EXTRA FEATURES

Build-in memory to register elapsed time since last expulsion.

Build-in memory to register elapsed time since last expulsion.

-

-

<sup>(1)</sup> Applicable for all serial numbers in following format: VIS-XX-XXXX, VPR-XX-XXXX, CON-XX-XXXX and CPR-XX-XXXX. <sup>(2)</sup> The average daily output is adjustable by using stroke washers whereby the amount of lubricant discharged per pumping cycle can be adjusted to your specific needs. <sup>(3)</sup> Tested with NGLI 2 grease at 20°C. <sup>(4)</sup> For any other viscosity level, please contact your representative. <sup>(5)</sup> Only applicable with batteries and lubricant adapted for low temperatures. <sup>(6)</sup> For ATEX environments, the mentioned ATEX certification only covers a temperature range from -20°C up to +40°C.

NEW

### ONE



### ONE PLUS







### EM



### EM PLUS




HOUSINGS

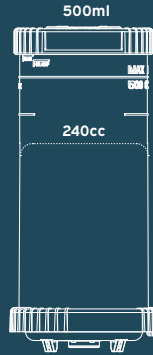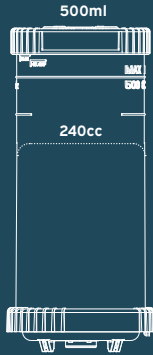

MEMO



MEMO COLOR



AVERAGE DAILY OUTPUT

0.6 cm<sup>3</sup>    1.2 cm<sup>3</sup>    2.4 cm<sup>3</sup>    7.2 cm<sup>3</sup>

0.6 cm<sup>3</sup>    1.2 cm<sup>3</sup>    2.4 cm<sup>3</sup>    7.2 cm<sup>3</sup>

0.15 cm<sup>3</sup>    0.3 cm<sup>3</sup>

0.15 cm<sup>3</sup>    0.3 cm<sup>3</sup>

DOSING FREQUENCY

24h    12h    6h    2h

24h    12h    6h    2h

24h    48h

24h    48h

CARTRIDGE REPLACEMENT INTERVAL

12 months    6 months    3 months    1 month

12 months    6 months    3 months    1 month

24 months    12 months

24 months    12 months

MAXIMUM STROKE PRESSURE

10 bar / 140 psi

10 bar / 140 psi

10 bar / 140 psi

10 bar / 140 psi

POWER SOURCE

3x 1.5V DC Alkaline batteries

3x 1.5V DC Alkaline batteries

3x 1.5V DC Alkaline batteries

3x 1.5V DC Alkaline batteries

REMOTE INSTALLATION DISTANCE

Up to 5 meters <sup>(3)</sup>

Up to 5 meters <sup>(3)</sup>

Up to 5 meters <sup>(3)</sup>

Up to 5 meters <sup>(3)</sup>

EXTERNAL TUBING

ø 8mm

ø 8mm

ø 8mm

ø 8mm

LUBRICANTS

Oil & Grease, up to NGLI #2 with an oil base between 100 and 1500 cSt <sup>(4)</sup>

Oil & Grease, up to NGLI #2 with an oil base between 100 and 1500 cSt <sup>(4)</sup>

Oil & Grease, up to NGLI #2 with an oil base between 100 and 1500 cSt <sup>(4)</sup>

Oil & Grease, up to NGLI #2 with an oil base between 100 and 1500 cSt <sup>(4)</sup>

TEMPERATURE EXPOSURE RANGE

-20°C to 60°C <sup>(5) (6)</sup>

-40°C to 60°C <sup>(5) (6)</sup>

-20°C to 60°C <sup>(5) (6)</sup>

-40°C to 60°C <sup>(5) (6)</sup>

CONNECTIONS

1/4 BSP

1/4 BSP

1/4 BSP

1/4 BSP

VISUAL ALARMS

N/A

**STATUS OK**    **ERROR**

N/A

**STATUS OK**    **ERROR**


EXTRA FEATURES

EX II 3 G Ex nC IIB T6 Gc  
EX II 3 D Ex tc IIIC T85°C IP66 Dc

EX II 3 G Ex nC IIB T6 Gc  
EX II 3 D Ex tc IIIC T85°C IP66 Dc

EX II 3 G Ex nC IIB T6 Gc  
EX II 3 D Ex tc IIIC T85°C IP66 Dc

EX II 3 G Ex nC IIB T6 Gc  
EX II 3 D Ex tc IIIC T85°C IP66 Dc

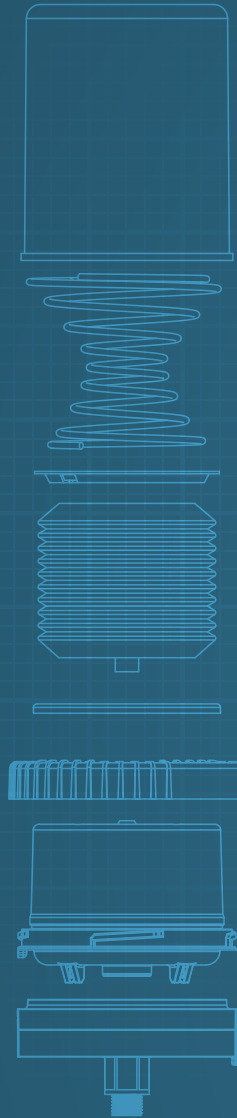

MEMOLUB INTERNATIONAL NV/SA  
RUE BOLLINCKX 43 - 1070 BRUSSELS - BELGIUM  
INFO@MEMOLUB.BE

MEMOLUB.COM



**DISTRIBUTOR:**

**INC NITIN CORPORATION**

402, 4th Floor, Bezzola Commercial Complex,  
V.N. Purav Marg, Sion-Trombay Road,  
Chembur, Mumbai – 400071,  
INDIA.

+91-9920404345

[aditya@corponit.com](mailto:aditya@corponit.com)

[nitincorporation@yahoo.com](mailto:nitincorporation@yahoo.com)